



SCD 2030

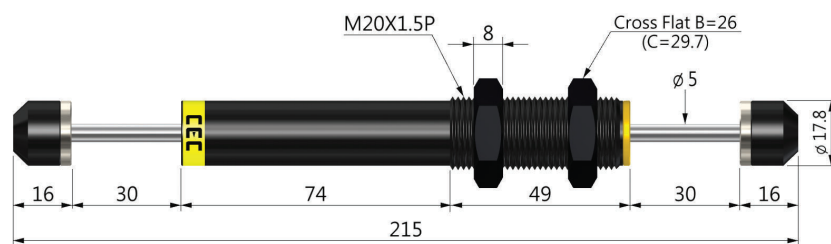


型 號 MODEL	螺 牙 THREAD	行 程 STROKE mm	最大吸收能量 MAX NM PER CYCLE (NM)	有效重量值 EFFECTIVE MAX WE (KG)	容許速度 MAX IMPACT SPEED (M/S)	每小時吸收能量 MAX NM PER HOUR (NM)	復歸彈力 RETURN FORCE N	操作溫度 OPERATING TEMP °C
SCD2030-1	M20 x 1.5	30	46	9 ~ 41	3.2	55,200	8 ~ 27	-10 ~ 70
SCD2030-2	M20 x 1.5	30	46	23 ~ 144	2.0	55,200	8 ~ 27	-10 ~ 70
SCD2030-3	M20 x 1.5	30	46	64 ~ 575	1.2	55,200	8 ~ 27	-10 ~ 70

SCD 2035

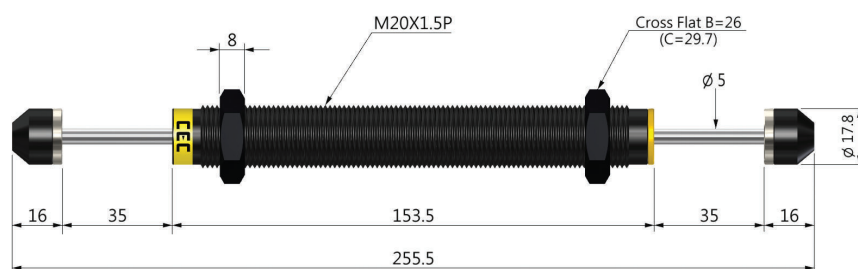

型 號 MODEL	螺 牙 THREAD	行 程 STROKE mm	最大吸收能量 MAX NM PER CYCLE (NM)	有效重量值 EFFECTIVE MAX WE (KG)	容許速度 MAX IMPACT SPEED (M/S)	每小時吸收能量 MAX NM PER HOUR (NM)	復歸彈力 RETURN FORCE N	操作溫度 OPERATING TEMP °C
SCD2035-1	M20 x 1.5	35	52	10 ~ 46	3.2	62,400	7 ~ 28	-10 ~ 70
SCD2035-2	M20 x 1.5	35	52	26 ~ 162	2.0	62,400	7 ~ 28	-10 ~ 70
SCD2035-3	M20 x 1.5	35	52	72 ~ 650	1.2	62,400	7 ~ 28	-10 ~ 70

SCD 2050

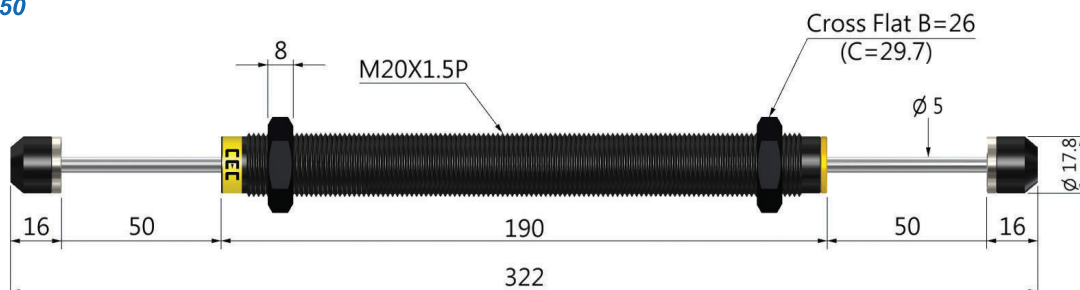

型 號 MODEL	螺 牙 THREAD	行 程 STROKE mm	最大吸收能量 MAX NM PER CYCLE (NM)	有效重量值 EFFECTIVE MAX WE (KG)	容許速度 MAX IMPACT SPEED (M/S)	每小時吸收能量 MAX NM PER HOUR (NM)	復歸彈力 RETURN FORCE N	操作溫度 OPERATING TEMP °C
SCD2050-1	M20 x 1.5	50	62	10.1 ~ 124	3.0	63,240	7 ~ 29	-10 ~ 70
SCD2050-2	M20 x 1.5	50	62	18.3 ~ 253	2.6	63,240	7 ~ 29	-10 ~ 70
SCD2050-3	M20 x 1.5	50	62	55 ~ 496	1.5	63,240	7 ~ 29	-10 ~ 70